

RENOBUILD SF COATING

Description

Renobuild SF Coating is a two pack Epoxy coating which provides protective and decorative properties to concrete, steel and other substrates.

The material is supplied as a two pack system, comprising pre-weighed amounts of BASE and CURING AGENT. After mixing together, an easily applied chemical and abrasion resistant finish is produced. A slip resistant finish may be achieved by broadcasting an appropriate aggregate.

Typical Uses

As a waterproof, tough, chemical resistant floor or wall coating in food preparation areas, breweries, abattoirs, bottling factories, etc.

As an internal lining for concrete, steel or brickwork storage tanks containing oils, chemicals, water, raw sewage, etc. It is particularly suitable for chemical bunds.

Advantages

- Solvent free, low odour
- Very good chemical resistance
- Excellent adhesion to concrete and steel
- High build
- Tough and durable
- Easily applied
- Hygienic and easily cleaned
- Slip resistant options
- Range of colours

Typical Properties

Pot life @ 20°C: 45 Minutes

@ 10°C: 90 Minutes

Colours: Grey, Red (BS4800 or RAL colours on request)

Coverage: 0.25-0.30kg/m²/coat

Tack free time @ 20°C: 6 hours

Hard dry time @ 20°C: 10 hours

Full chemical resistance @ 20°C: 7 days

Adhesion strength to concrete: 3.9 MPa (concrete failure)

Adhesion strength to mild steel: >12 MPa

Chemical resistance: excellent resistance to dilute acids, dilute alkalis, oil, petrol, diesel, vegetable oils, raw sewage etc. Please consult our Technical Department for specific advice.

Packaging

Renobuild SF Coating is supplied in 5kg and 15kg packs

Procedure

Surface Preparation

- a) Concrete shall be a minimum of 21 days old and/or the residual moisture content shall be below 6%. Ensure that the concrete is clean and free from dust, laitance, grease, oil, curing compound and existing paint finishes etc. Blow holes and defective concrete shall be made good using a proprietary repair compound e.g. Renobuild Floorpatch or Renobuild EPA. Block work shall be sealed using Renobuild Surfer. Suitable mechanical treatment such as vacuum grit blasting is the preferred treatment prior to application as this ensures a mechanical 'key' for the coating.
- b) Steel surfaces shall be shot blasted or grit blasted to a nominal Sa 2.5 Swedish standard. All dust and grease shall be removed prior to coating application. If a delay is likely to occur between blasting and application then it is recommended that a coat of Renobuild Steelprime is applied as holding primer to obviate flash rusting.

Mixing

Pour the contents of the CURING AGENT container into the BASE container and thoroughly mix, preferably by mechanical means until a uniform colour is achieved.

Application

Apply by brush, roller or airless spray at a nominal rate of 0.25 to 0.3kg/m². After a minimum of 14 hours and before a maximum of 48 hours, apply a second coat at the same rate. Should a non-slip finish be required, then broadcast an appropriate aggregate such as Quartz or Dynagrip, immediately after the first coat. Brush off excess aggregate the following day, prior to applying the second coat.

Equipment Cleaning


Clean equipment with Renobuild Toolclean prior to curing of the coating.

Curing

Allow to cure for a minimum of 24 hours @ 20°C prior to light foot traffic access and 48 hours @ 20° prior to vehicular trafficking.

7 days cure @ 20°C is recommended prior to exposure to chemicals.

Lower temperatures will extend the curing time.

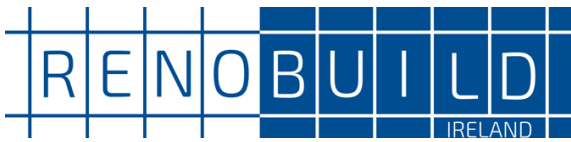

RENOBUILD SF COATING

Storage and Shelf Life

Store in dry conditions, out of direct sunlight, at temperatures between 10°C and 25°C.

Renobuild SF Coating has a minimum shelf life of 12 months when stored in original, unopened containers in accordance with manufacturer's instructions.

Coverage

A 5kg pack is sufficient to treat 8.3-10.0 m² of surface with the recommended two coat treatment, providing an overall d.f.t. of 400-480 microns.

Limitations

Do not apply to wet or uncured concrete surfaces.

Do not apply at temperatures of 3°C or less.

Health and Safety

Avoid contact of the material with skin and eyes.

Wear gloves and goggles

Wash off splashes immediately with soap and water.

Any eye contamination must be rapidly irrigated with copious amounts of clean water, and immediate medical attention sought.

Please refer to Material Safety Data Sheet for additional information

Renobuild SF Coating shall be applied strictly in accordance with the manufacturer's instructions

For specific advice regarding any aspect of this product, please consult our Technical Department at renobuild@resbuild.co.uk

The information provided in this Product Data Sheet is intended for general guidance only and is given in good faith based on Resin Building Products Limited current knowledge and experience. No warranty in respect of fitness for a purpose, or any other liability whatsoever can be inferred from the information contained within this data sheet. Users should determine the suitability of the materials for their particular application and should always refer to the most recent issue of the Product Data Sheet for the product concerned. All materials are supplied in accordance with our standard terms and conditions of sale (available upon request).



RENOBUILD TEXTURING ADDITIVE

RENOBUILD TEXTURING ADDITIVE

Revision: 01/18

Description

Renobuild Texturing Additive is a micronized polymer bead ideal for providing a measure of slip resistance to coatings and sealers.

The rounded shape of Renobuild Texturing Additive provides optimum abrasion resistance without sharp edges, allowing ease of surface cleaning.

The product is also gentle to bare feet, allowing it's use on pool decks & patios etc.

Typical Uses

In coatings and sealers to impart a lightly textured finish that increases slip resistance. e.g. factory floors, driveways, garages, wet rooms etc.

Advantages

- Non-Toxic
- Controlled particle distribution gives uniform finish.
- Easily incorporated to all coatings and sealers.
- Economical.
- Good balance between slip resistance and ease of cleaning.
- No hard or sharp edges.

Procedure

Renobuild Texturing Additive is added to the mixed coating and stirred thoroughly prior to application.

For specific advice regarding any aspect of this product, please consult our Technical Department at renobuild@resbuild.co.uk

Pack Sizes

Renobuild Texturing Additive is usually supplied in pre-weighed amounts corresponding to the size of the pack it is being added to. Alternatively, Renobuild Texturing Additive can be supplied pre-dispersed; this can be requested when placing an order.

Renobuild Texturing Additive is supplied in 3 grades:

Fine Grade

Typically used in Renobuild WB Coating

Standard Grade

Typically used in Renobuild SF Coating

Course Grade

Typically used in Renobuild Ultracoat

Health and Safety

Please refer to Material Safety Data Sheet for additional information.

Renobuild Texturing Additive shall be applied strictly in accordance with the manufacturer's instructions.

For specific advice regarding any aspect of this product, please consult our Technical Department.

PTV Results

Product	Dry PTV	Wet PTV
<i>WB Coating</i>	58-60	45-48
<i>SF Coating</i>	48-50	40-42
<i>DPM</i>	49-51	40-43
<i>WB Primer/ Sealer</i>	50-52	40-42

Test results for other products available on request.

A wet PTV of >36 is considered 'low slip potential'

The information provided in this Product Data Sheet is intended for general guidance only and is given in good faith based on Resin Building Products Limited current knowledge and experience. No warranty in respect of fitness for a purpose, or any other liability whatsoever can be inferred from the information contained within this data sheet. Users should determine the suitability of the materials for their particular application and should always refer to the most recent issue of the Product Data Sheet for the product concerned. All materials are supplied in accordance with our standard terms and conditions of sale (available upon request).

Manufacturing Partners

Resin Building Products Limited, Resbuild House, Unit 2 Durham Lane, Armthorpe, Doncaster DN3 3FE.