



Available in 100%
recycled Eco version

FLEXI-TILE DIAMOND STANDARD

The Flexi-Tile Diamond Standard is designed for a wide range of applications including commercial, domestic and light industrial flooring.

The Flexi-Tile Diamond Standard is designed to be installed on damaged, cracked and damp concrete/epoxy surfaces, which makes it more versatile than most other types of flooring. With minimal sub-floor preparation, the unique loose-lay system means the Flexi-Tile Diamond Standard is quick and easy to install, with minimal down-time since it can be laid in sections.

The Diamond Standard is manufactured with the unique 'butterfly' interlock design, giving it increased structural strength, whilst maintaining ease of installation. At 4mm thick, the Flexi-Tile Diamond Standard is generally not suitable for heavy industrial use, but is perfect for practically any other flooring application.

Available in 8 different colours, the Diamond Standard is regularly used in commercial premises and public areas, such as gyms, schools and garage showrooms. With anti-slip and noise reduction attributes, all Flexi-Tile flooring meets EU building safety standards whilst also looking visually attractive and feeling comfortable underfoot. Easily cleaned and maintained, every Flexi-Tile range comes with a full 25-year guarantee.


Benefits and features of this product are:

- 25-year wear guarantee
- Easy installation
- Low maintenance
- Reaction to fire - BFL S1
- Anti-slip
- Resistant to most chemicals
- 100% recyclable
- Sound absorbing
- Resists punctures & abrasions
- Available in a standard or ESD version

Colour Options

Diamond standard Range

Diamond standard tiles are available in the following colours:

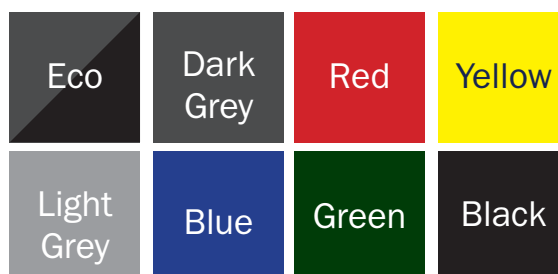

N.B. Other colours are available depending on quantity required. Colours shown above may vary from colour of manufacture.